

Pickio Floor Tow Truck

Its indoor specification allows towing max. 4 tons of loads.

Easy

Anyone can use Pickio Floor Tow Truck to easily move cargo indoors.



Adoption of large capacity AC motor and electronic control technology makes it easy to start, run, and stop the vehicle.



The bike handle is same operation feeling as a bicycle or a motorbike.

Safety & Compact

Pickio is a compact specification which provides a driver's cockpit. It enables easy handling, reduces labor, and helps prevent accidents from picking work.



Long Time Long Life

Pickio adopts the same large capacity battery of forklift. The battery offers max. 9 hours operation time^{*1}. Under normal usage, it has a service life of about 4 years^{*2}.

^{*1} Operation rate 55%, discharge rate 75%, as obtained from result of Sumitomo experiment based on JIS D6202.

^{*2} Based on number of charge/discharge cycles in 7.5 hours of operation.



A compact and powerful indoor tractor. The compact specification enables easy use indoors, while providing power to carry max. 4 tons (1 t × 4) of loads.




Battery side removal

A side-removal type battery for convenient replacement is installed as standard.

Interlock

This function cuts the power in moving and cargo handling, and prevents accidental operation by mistake when the operator is not on board.

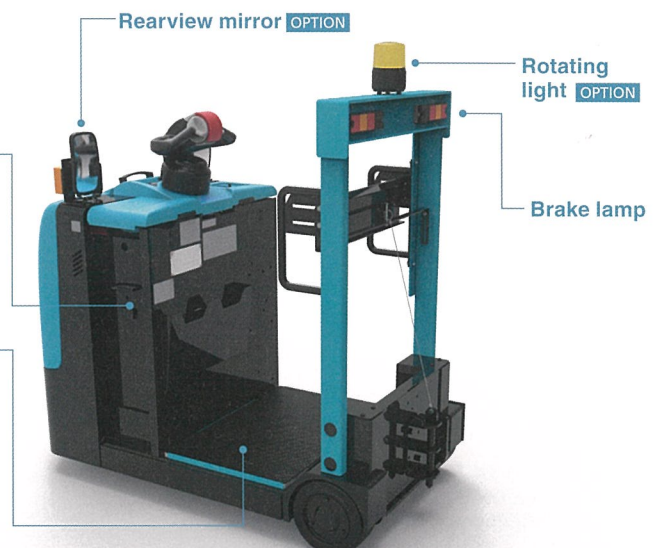


Floor Tow Truck

Major factors specification

				71-ERT40SI
	Item	Unit		Standard
Performance	Maximum towing capacity (total weight of towed truck including cargo bay)	kg		4,000
	Travel speed (forward/reverse)	No load	km/h	6/2
		Load	km/h	4/2
	Minimum turning radius (exterior)	mm	C	1,490
Main dimensions	Overall length	mm	D	1,515
	Overall width	mm	E	796
	Overall height	mm	F	1,400
	Wheelbase	mm	L	1,100
	Tread (front/rear wheel)	mm	M/N	None/680
	Minimum ground clearance (center of vehicle body)	mm	P	75
	Floor height	mm	Q	200
Tire	Vehicle weight	kg		785
	Front wheels (drive wheels)			Φ254×90 Urethane
	Rear wheels			Φ255×114 rubber
Electrical device	Traveling output	kW		2.6
	Steering output	kW		0.3
	Charger (stationary type)	Input		3-phase/200-230 V
Battery	Transformer capacity	kVA		2.1
		V/Ah (5HR)		24/201
	Weight	kg		185

Dimensional drawing

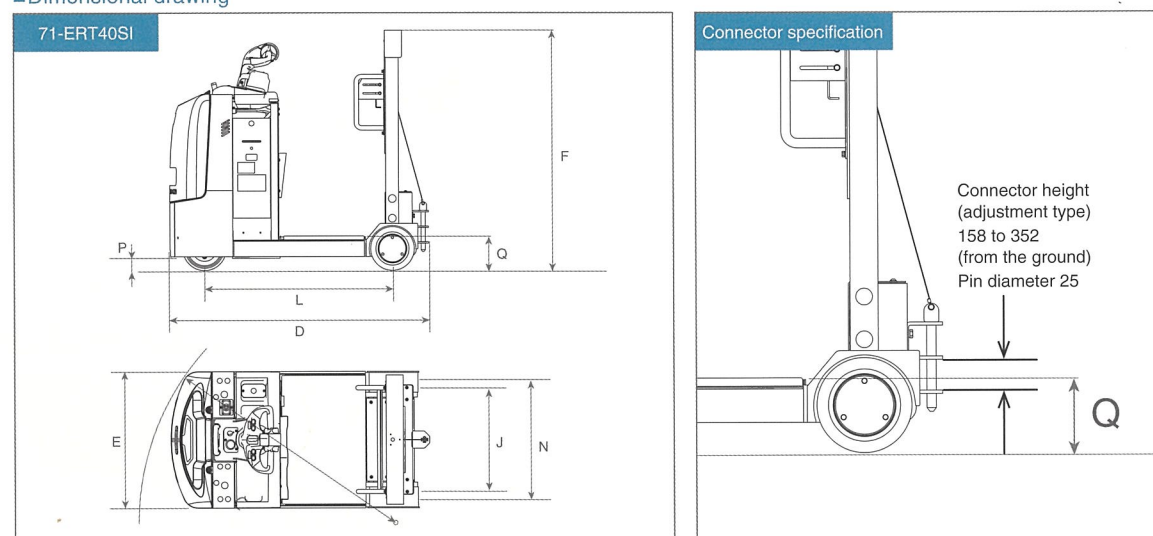

**SUMITOMO
NACCO FORKLIFT**

Sumitomo NACCO Forklift Co., Ltd.

2-75, Daito-cho, Obu, Aichi, 474-8555, Japan
TEL 0562 (48) 5251 FAX 0562 (48) 5396
<http://www.sumitomonacco.co.jp>

- Contact Sumitomo Nacco Forklift sales distributors who could provide professional after-sales services.

* This specification and equipment are subject to change without notice.
* Photos in this catalog may differ slightly from actual colors due to the nature of ink.



ERT-04A